


- ALL-IN-ONE
- MOBILITY
- MODULAR
- PANELS PC
- PRINTERS
- DISPLAYS
- ACCESSORIES

YUNO KIOSK 15/17"

compact, multi-application
integrated system

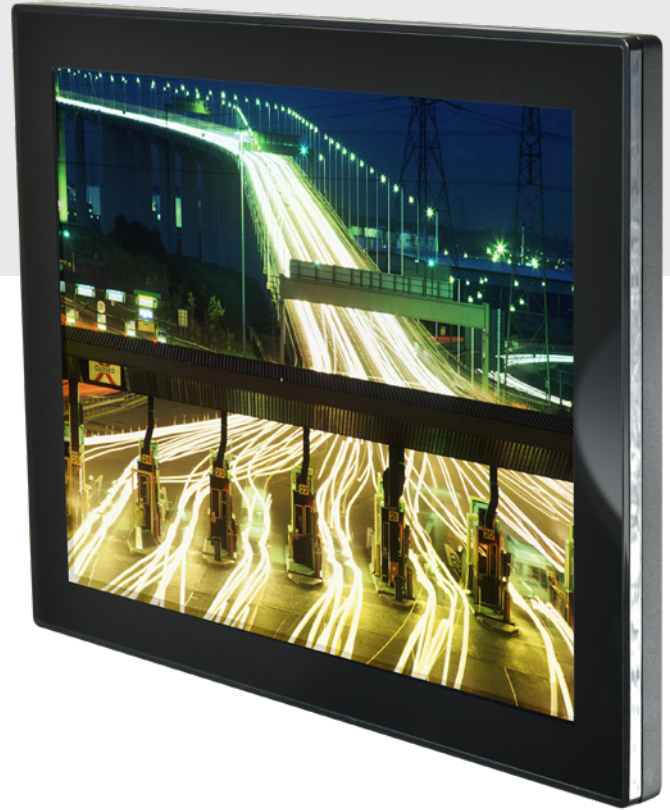

All in one OEM & POS
system for all vertical
kiosk applications

Yuno is a robust and compact equipment, designed by AURES to suit the many applications of the OEM and POS vertical sectors.

This fanless high-performance hardware, fitted with a Broadwell i5 5010U or a i3-5010U - or also a Quad-Core Bay Trail platform is available in a traditional 4:3 15.1" & 17" format and equipped with a shock- and scratch-proof, multi-touch, projected, capacitive screen (PCAP technology).

Very flexible, **YUNO Kiosk 15/17** is offered with VESA fixings options, for easy installation in all kiosks.

The standard version features a 128GB flash disk (2.5" SSD) and stands up to dirt in the toughest industrial or POS settings (dust, splashes and left-overs...). It integrates an energy efficient Bay Trail J1900 or Broadwell i5 or i3 processor and a

heat-dissipating aluminium structure, ensuring compliance with environmental standards (low carbon footprint).

YUNO Kiosk 15/17 is an accessible product whose many features (technology, ergonomics, innovation and design) make it good value for money. It constitutes a sensible, cost-effective and long-term investment for any IT equipment.



YUNO KIOSK 15/17"

- Compact, heavy duty but stylish POS terminal
- Broadwell i5 or i3 or Quad-Core Bay Trail J1900 processor
- 2.5" 128GB SSD (2 slots)
- Projected, capacitive, multi-touch screen (PCAP)
- 4 GB memory as standard (upgradable to 8 GB)
- Discreet yet easily accessible connectivity
- Mini DP output for 2nd screen
- Energy efficient processor and low carbon footprint
- Available with VESA bracket option(s), for wall or pole mounting installations



MODEL	YUNO KIOSK 15/17"
Processor	Broadwell i5-5350U or i3-5010U or BayTrail J1900 Quad Core (choice of 3 processors)
RAM	DDR3 SODIMM 4 GB as standard (up to 8 GB)
SSD	2.5" 128GB (2 slots)
LCD	15" TFT (1024 x 768), 17" TFT (1820 x 1024) LED back-lighting
Touchscreen	Flat, zero bezel multi-touch screen – with projected, capacitive panel (PCAP)
Brightness	250 cd/m ² (15"), 212 cd/m ² (17")

INPUT-OUTPUT PORTS	
Serial	4 serial ports (+ 5/12 V power supply for COM3 / COM4)
USB	5 USB 2.0 ports + 1 USB 3.0 port (for the J1900 version) 4 USB 2.0 + 2 USB 3.0 (for the i5 and i3 version)
LAN	10/100/1000Base-T
2 nd Screen	Port with support for HDMI, DVI and VGA (mini Display Port)
Audio	Internal loudspeaker, headphones, micro jack plug
Power Supply	+ external 19 V DC
Mini-PCI Express	1 Mini PCI Express slot (WIFI)

MISCELLANEOUS	
EMI	CE/FCC Class A
Safety	LVD, external adaptor UL c/us, CE, TUV, etc.
Operating Temperature	0 ~ 50 °C
Front	Dust- and splash-proof IP 65
Colours	Black
Materials	Polycarbonate (cover) + aluminium (structure)
VESA	75 x 75
Dimensions (W x D x H)	360.1 x 45 x 238.1 mm (15.1" format) / 369 x 57,6 x 307 mm (17")
Weight	4.7 kg (15.1") / 3.83 kg (17")
Compatible OS	Windows 10 IoT Enterprise, Windows 8.1 Industry Pro, Windows 7 Pro, POSready 7, Linux, Android

OPTIONAL EXTRAS	
MSR	3 ISO tracks, OPOS support
RFID / Addimat and/or Dallas readers	1 slot, at right of EPOS terminal
Fingerprint reader	Yes
Barcode reader	1D and 2D
2 nd screen	10.1" - 16:9 1024 x 600 Flat LED screen (EPOS digital signage)
WIFI / Bluetooth	Combo WIFI 802.11 a/b/g/n + BT 4.0

Specifications are subject to change without notice - © AURES 2020